



**12V up to 75 A  
24V up to 37.5 A  
Same Unit!**

**Features**

**Switch for Charging Both 12V or 24V Battery Banks**

**Charge rate selectable from 20%-100%**

**Battery types: Lead Acid, Gel, AGM,  
& Lithium Iron Phosphate(LiFePO4)**


**Dripshield Included with Charger**

**LED Fault indicator for troubleshooting**

**RS232 NEMA Output**

**UL458 & CSA 22.2#107.1 CERTIFIED**

**2 Year Warranty**

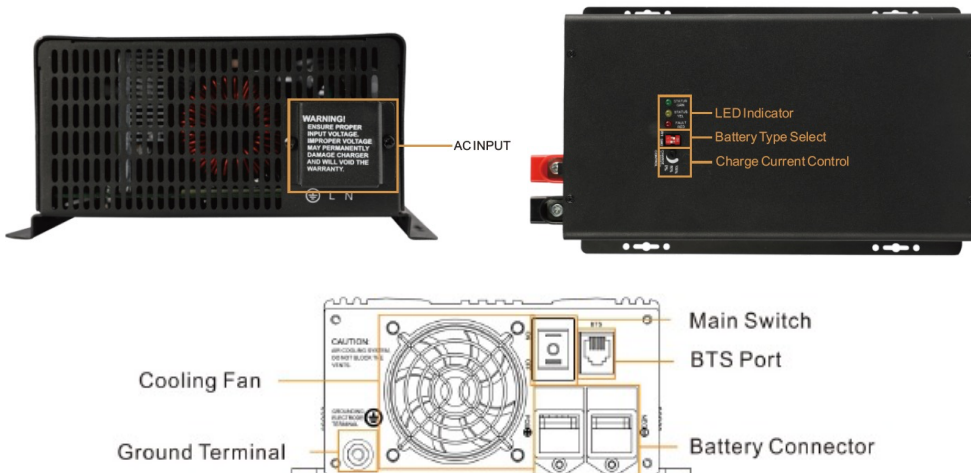

Model No: BC112L

**Specs**

Nominal Voltage	95-145 V AC
50% derated Voltage	70-94 V AC
Frequency	40 - 70 Hz
Input Current	<9 A AC
Output Voltage	12/24 V DC
Output Current 12V	15-75A
24V	7.5-37.5A
Weight	2.5 Kg / 5.5 lbs.
Ambient Temp.	(-10) - (+50) °C

**Dimensions**

	inch	mm
L	10.3	261
H	2.75	70
W	6.3	160

**Optional**

**Temp. Sensor**

**Power supply function**