



**12V up to 150 A
24V up to 75 A
Same Unit!**

Features

Switch for Charging Both 12V or 24V Battery Banks

Charge rate selectable from 20%-100%

**Battery types: Lead Acid, Gel, AGM,
& Lithium Iron Phosphate(LiFePO4)**


Dripshield Included with Charger

LED Fault indicator for troubleshooting

RS232 NEMA Output

UL458 & CSA 22.2#107.1 CERTIFIED

2 Year Warranty

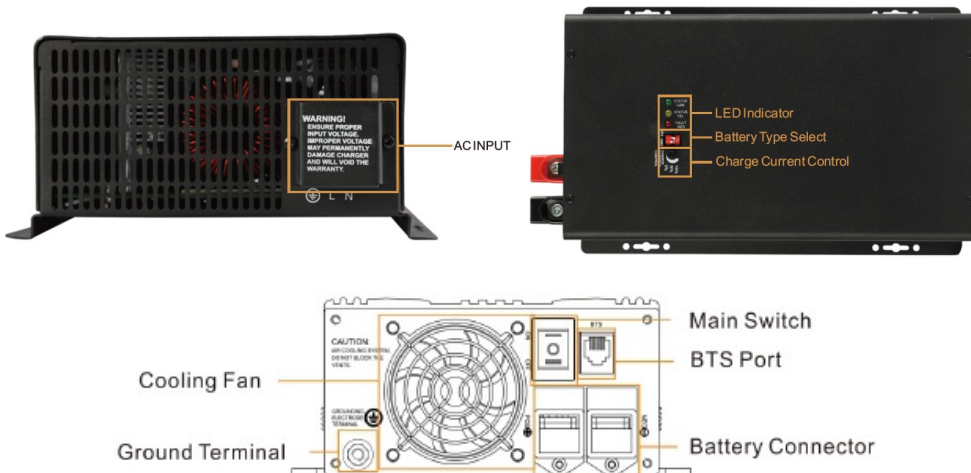

Model No: BC212L

Specs

Nominal Voltage	95-145 V AC
50% derated Voltage	70-94 V AC
Frequency	40 - 70 Hz
Input Current	<18A AC
Output Voltage	12/24 V DC
Output Current 12V	30-150A
24V	15-75A
Weight	3.5 Kg / 7.7 lbs.
Ambient Temp.	(-10) - (+50) °C

Dimensions

	inch	mm
L	12.4	315.5
H	3.4	85
W	7.2	183

Optional

Temp. Sensor

Power supply function